

Model FL7030CC
Electric Field Probe with Custom Calibration
5kHz–30MHz
1.5–300 V/m
User-Selectable X, Y, Z Axes



The FL7030CC is a smart, fast, extremely accurate electric field probe that contains an internal microprocessor to provide linearization, temperature compensation, control, and communication functions. Noise reduction and temperature compensation allow accurate measurements down to 1.5 V/m without zero adjustment. When rotated about its critical angle mount, the probe provides isotropic response of ± 0.5 dB over its specified frequency range.

The FL7030CC is laser powered to allow for continuous operation without battery recharging or replacement.

Correction factors are provided with the probe. These factors can be loaded into the Model FM7004 Field Monitor (sold separately) to automatically correct the probe readings at user-specified frequencies. When correction factors are applied, the true accuracy of the probe can be realized.


It communicates and is powered through glass fiber optic cables, up to 100 meters long, to the FI7000 interface. X, Y, Z, and isotropic readings can be returned through an FI7000 in 20 msec.

Correction factors are provided with the probe. These factors can be loaded into the Model FM7004 Field Monitor (sold separately) to automatically correct the probe readings at user-specified frequencies. When correction factors are applied, the true accuracy of the probe can be realized.


The FL7030CC extends the range of AR laser powered E-field probes down to 5kHz. It offers an extended post-detection response-smoothing time constant to provide more consistent readings for carrier frequencies down to 5kHz.

*NOTES: This probe requires an FI7000 for power and communication.
 FM7004 is recommended for local monitoring and control.
 Requires FI7000, FC7010 and MA7000 (sold separately).*

FL7030CC Typical Uncalibrated Frequency Response

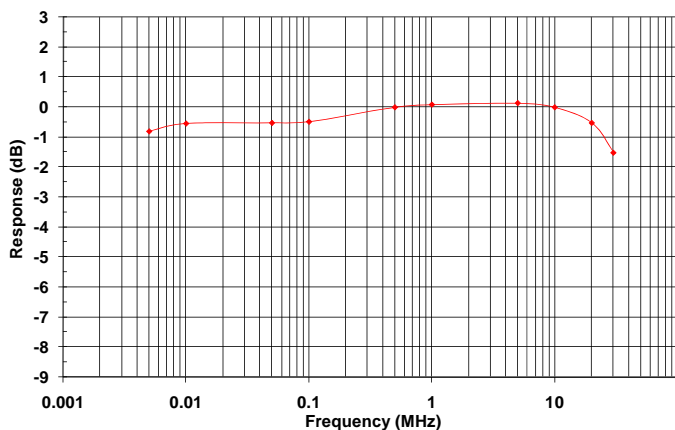

FL7030CC Typical Calibrated Frequency Response (with correction factors applied)

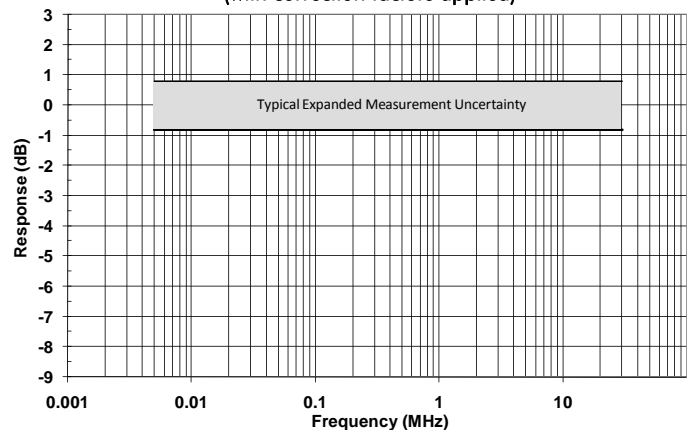

SPECIFICATIONS, FL7030CC

Amplitude Accuracy (field aligned with sensor axes)	
Without correction factors applied	±1.0 dB @ 10 MHz
With correction factors applied.....	Typical expanded measurement uncertainty (95% confidence interval) 0.8 dB, 5 kHz–30 MHz
Response Time/ Sampling Rate (through FI7000).....	20 msec/up to 50 samples per second at FI7000 USB and GPIB interfaces
Response smoothing time constant.....	10 msec nominal
Isotropic Deviation (measured at the critical angle)	±0.5 dB @ 10 MHz ±0.5 dB, 5 kHz–30 MHz (typical)
Operating Range	1.5–300 V/m
Linearity, 1.5 to 300 V/m	±0.5 dB and ±0.9 V/m
Temperature Stability.....	±0.5 dB over operating temperature range
Damage Level.....	1000 V/m continuous field
Ranges	Single range
Data returned from probe	X, Y, Z axes, and composite
Power Requirements	Laser powered from FI7000 interface
Dimensions.....	5.7 x 5.7 x 5.7 cm (2.25 x 2.25 x 2.25 in) 2.92 cm (1.15 in) DIA spherical housing 3.18 cm (1.25 in) sensor radome per axes
Weight	62.5 g (2.2 oz)
Operating Temperature Range	10°C to 40°C (50°F to 104°F) @ 5% to 95% RH non–condensing
Fiber Optic Cable Connectors	Two E2000 compact duplex connectors at 1 meter, includes fiber optic verification loop.
Calibration Data	Accredited Calibration Report supplied with probe. User-specified calibration requirements must be provided using Form 647 at time of quote.